


PREMIUM SERIES ADJUSTABLE PEDESTALS & AUXILIARY PARTS



Product Data Sheet

- Plastic raised floor pedestals are used in trafficable and non-trafficable flat roofs, in order to reach the desired final level and to remove the slope differences. The purpose here is to make the top coat flooring without placing a protection alum on the insulation and to establish a consistent drainage system by means of the open joint gaps of the floor cover. At the same time, these pedestals establishing a system, which is open to interference any time, are also quite durable with their min. bearing capacity of **2000 lbs.** Contains more than **30% post-industrial recycled material.**
- Multiple auxiliary parts can be applied the same unit. Coupler must be used when the system is longer than 7 inches. There is no need coupler until **7 inches.** Code: T-C
- **Slope corrector**, working with the bottom of the pedestal, avoids pressures of drain slopes on plates. Slope corrector can tolerate an degree several angles. Alternatives of 1 % and 2% are available. Code: T-SC
- Made of natural rubber material, the orthopedic floor pad helps to absorb all impact vibrations caused by bumpy surfaces. Thickness is 0.2 Code: T-P
- Pedestal bracing system for additional stability and heights over 24 inches. Impervious to water, mold and freeze/ thaw cycles.

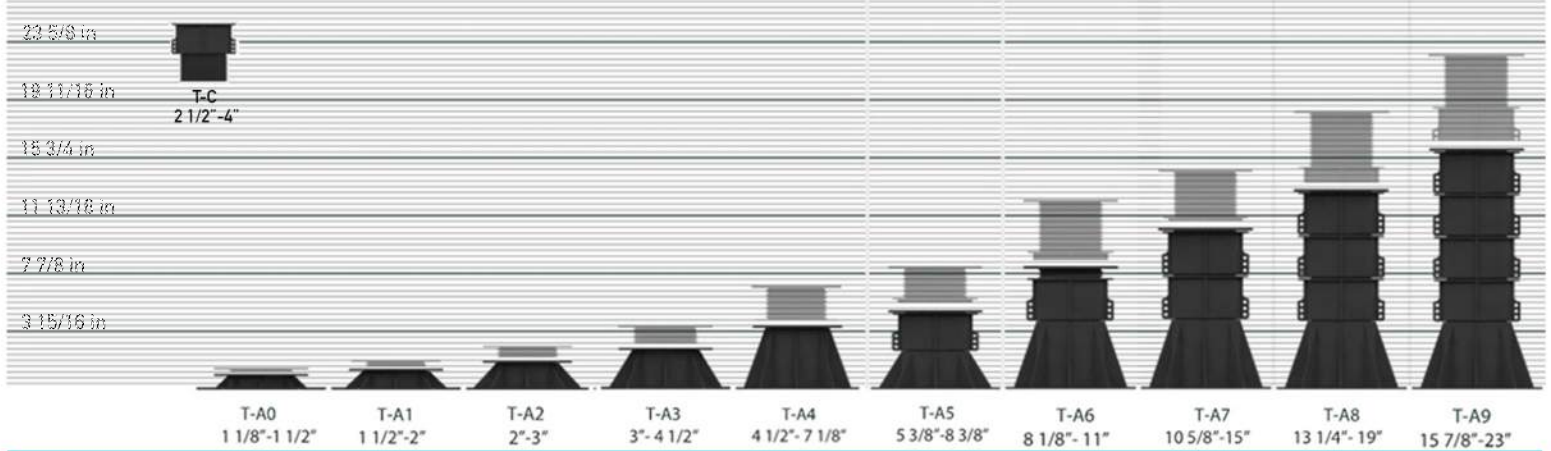

PRODUCT DETAILS

<p>ADJUSTABLE PEDESTAL (T-A) Recycled-Polypropylene Bearing Capacity: 2000 lbs</p>	<p>COUPLER (T-C) Recycled-Polypropylene Height: 2 1/2" - 4"</p>	<p>FIXED PEDESTAL (C-F) Recycled-Polypropylene Bearing Capacity Min: 2000 lbs</p>	<p>FIXED JOINT STRIPS (T-SF) Recycled-Polypropylene Thickness : 1/8"</p>
<p>PLUS SHAPE FORMED JOINT STRIPS (T-SP) Recycled-Polypropylene Thickness : 1/8"</p>	<p>COUPLER (T-C) Recycled-Polypropylene Height: 2 1/2" - 4"</p>	<p>SLOPE CORRECTOR (T-SC) Recycled-Polypropylene Grade: %1 and %2</p>	<p>CARCASS ASSEMBLY EQUIPMENT (T-AW) Recycled-Polypropylene Thickness : 1/8"</p>
<p>DIAGONAL CARCASS ASSEMBLY UNIT (T-AR) (Rotatable self-axis) Recycled-Polypropylene</p>	<p>ORTHOPEDICS FLOOR PAD Natural Rubber (T-P) Thickness : 1/5"</p>	<p>FIXED JOINT STRIPS (T-ST) Recycled-Polypropylene Thickness : 1/16" to 1/4</p>	<p>SHIMS (T-S) EPDM Thickness : 0.05" to 0.08"</p>